

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number
WO 2005/015667 A2

(51) International Patent Classification⁷: **H01M 4/88**, 8/10

(74) Agents: **OKABE, Masao** et al.; No. 602, Fuji Bldg., 2-3, Marunouchi 3-chome, Chiyoda-ku, Tokyo, 1000005 (JP).

(21) International Application Number:

PCT/JP2004/011727

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 10 August 2004 (10.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2003-291207 11 August 2003 (11.08.2003) JP

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **NORDSON CORPORATION** [US/US]; 28601 Clemens Road, Westlake, Ohio, 441451119 (US).

(72) Inventor; and


(75) Inventor/Applicant (*for US only*): **MATSUNAGA, Masafumi** [JP/JP]; c/o Nordson Kabushiki Kaisha, Toshin Building 8 Floor, 5-21, Katsushima 1-chome, Shinagawa-ku, Tokyo, 1400012 (JP).

Published:

— *without international search report and to be republished upon receipt of that report*

[Continued on next page]

(54) Title: ELECTROLYTE MEMBRANE, ELECTROLYTE MEMBRANE COMPOSITE, METHOD OF MANUFACTURING ELECTROLYTE MEMBRANE COMPOSITE, ELECTROLYTE MEMBRANE-ELECTRODE ASSEMBLY FOR FUEL CELL, METHOD OF MANUFACTURING ELECTROLYTE MEMBRANE-ELECTRODE ASSEMBLY FOR FUEL CELL, AND FUEL CELL

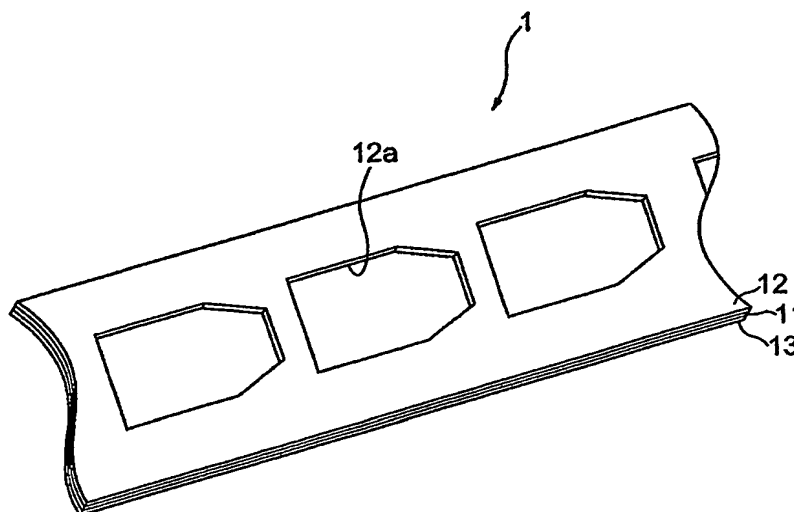

(57) Abstract: An electrolyte membrane is for forming an electrode having a desired shape with high quality and highly efficient productivity. Masking members (12 and 13) having holes (12a and 13a) bored in a desired electrode shape are attached to at least one side of an electrolyte membrane (11) for a fuel cell before an electrode is applied to the electrolyte membrane, in a self-adhering fashion or through a slight adhesive.



WO 2005/015667 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.